




Flamefighter Corporation
208 Industrial Blvd., Waconia, MN 55387
Bus: (952) 442-2977
Fax: (952) 442-4106
www.flamefighter.com

Specifications

900 Series Piercing Nozzles

These Piercing Nozzles combine the best of durability for the rugged demands of the Fire Service worldwide. Their flexibility and light weight design help make this nozzle an added accent to any department.

- All Piercing Nozzles have removable nozzles which allow for extension tubes to be added for extra reach (2 feet per extension).
- They can also be driven in with a mallet if needed. This unique nozzle design needs to be driven in only 3.75 inches to have full penetration of the sprayer unit. Ideal for fire in walls, attics, basements, mobile homes, garages, vehicles or any confined space, with coverage of up to 25 feet in all directions. They are powerful with 100 PSI with delivery of Max. 174 GPM (except the 906 139 GPM).
- The 902 & 904 Piercing Nozzles feature a unique safety handle. The safety handle allows a firefighter to safely hold the unit when a mallet is being used to drive the nozzle in. The handle is removable if needed.
- They come with 1.5 NST threads as standard, other threads are available by request.
- The pictured Shut off valve is our part # 3001.

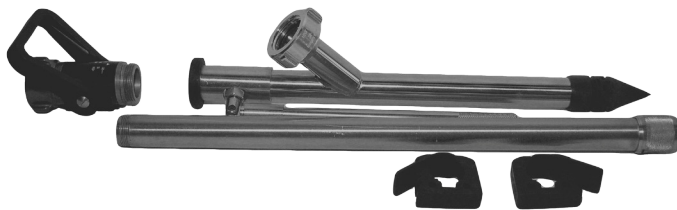


902 - without shutoff valve
902K - with shutoff valve



904 - without shutoff valve
904K - with shutoff valve



906 - without shutoff valve
906K - with shutoff valve

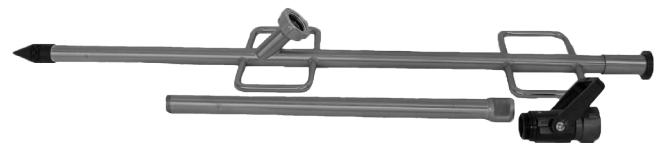

910 - without shutoff valve
910K - with shutoff valve